


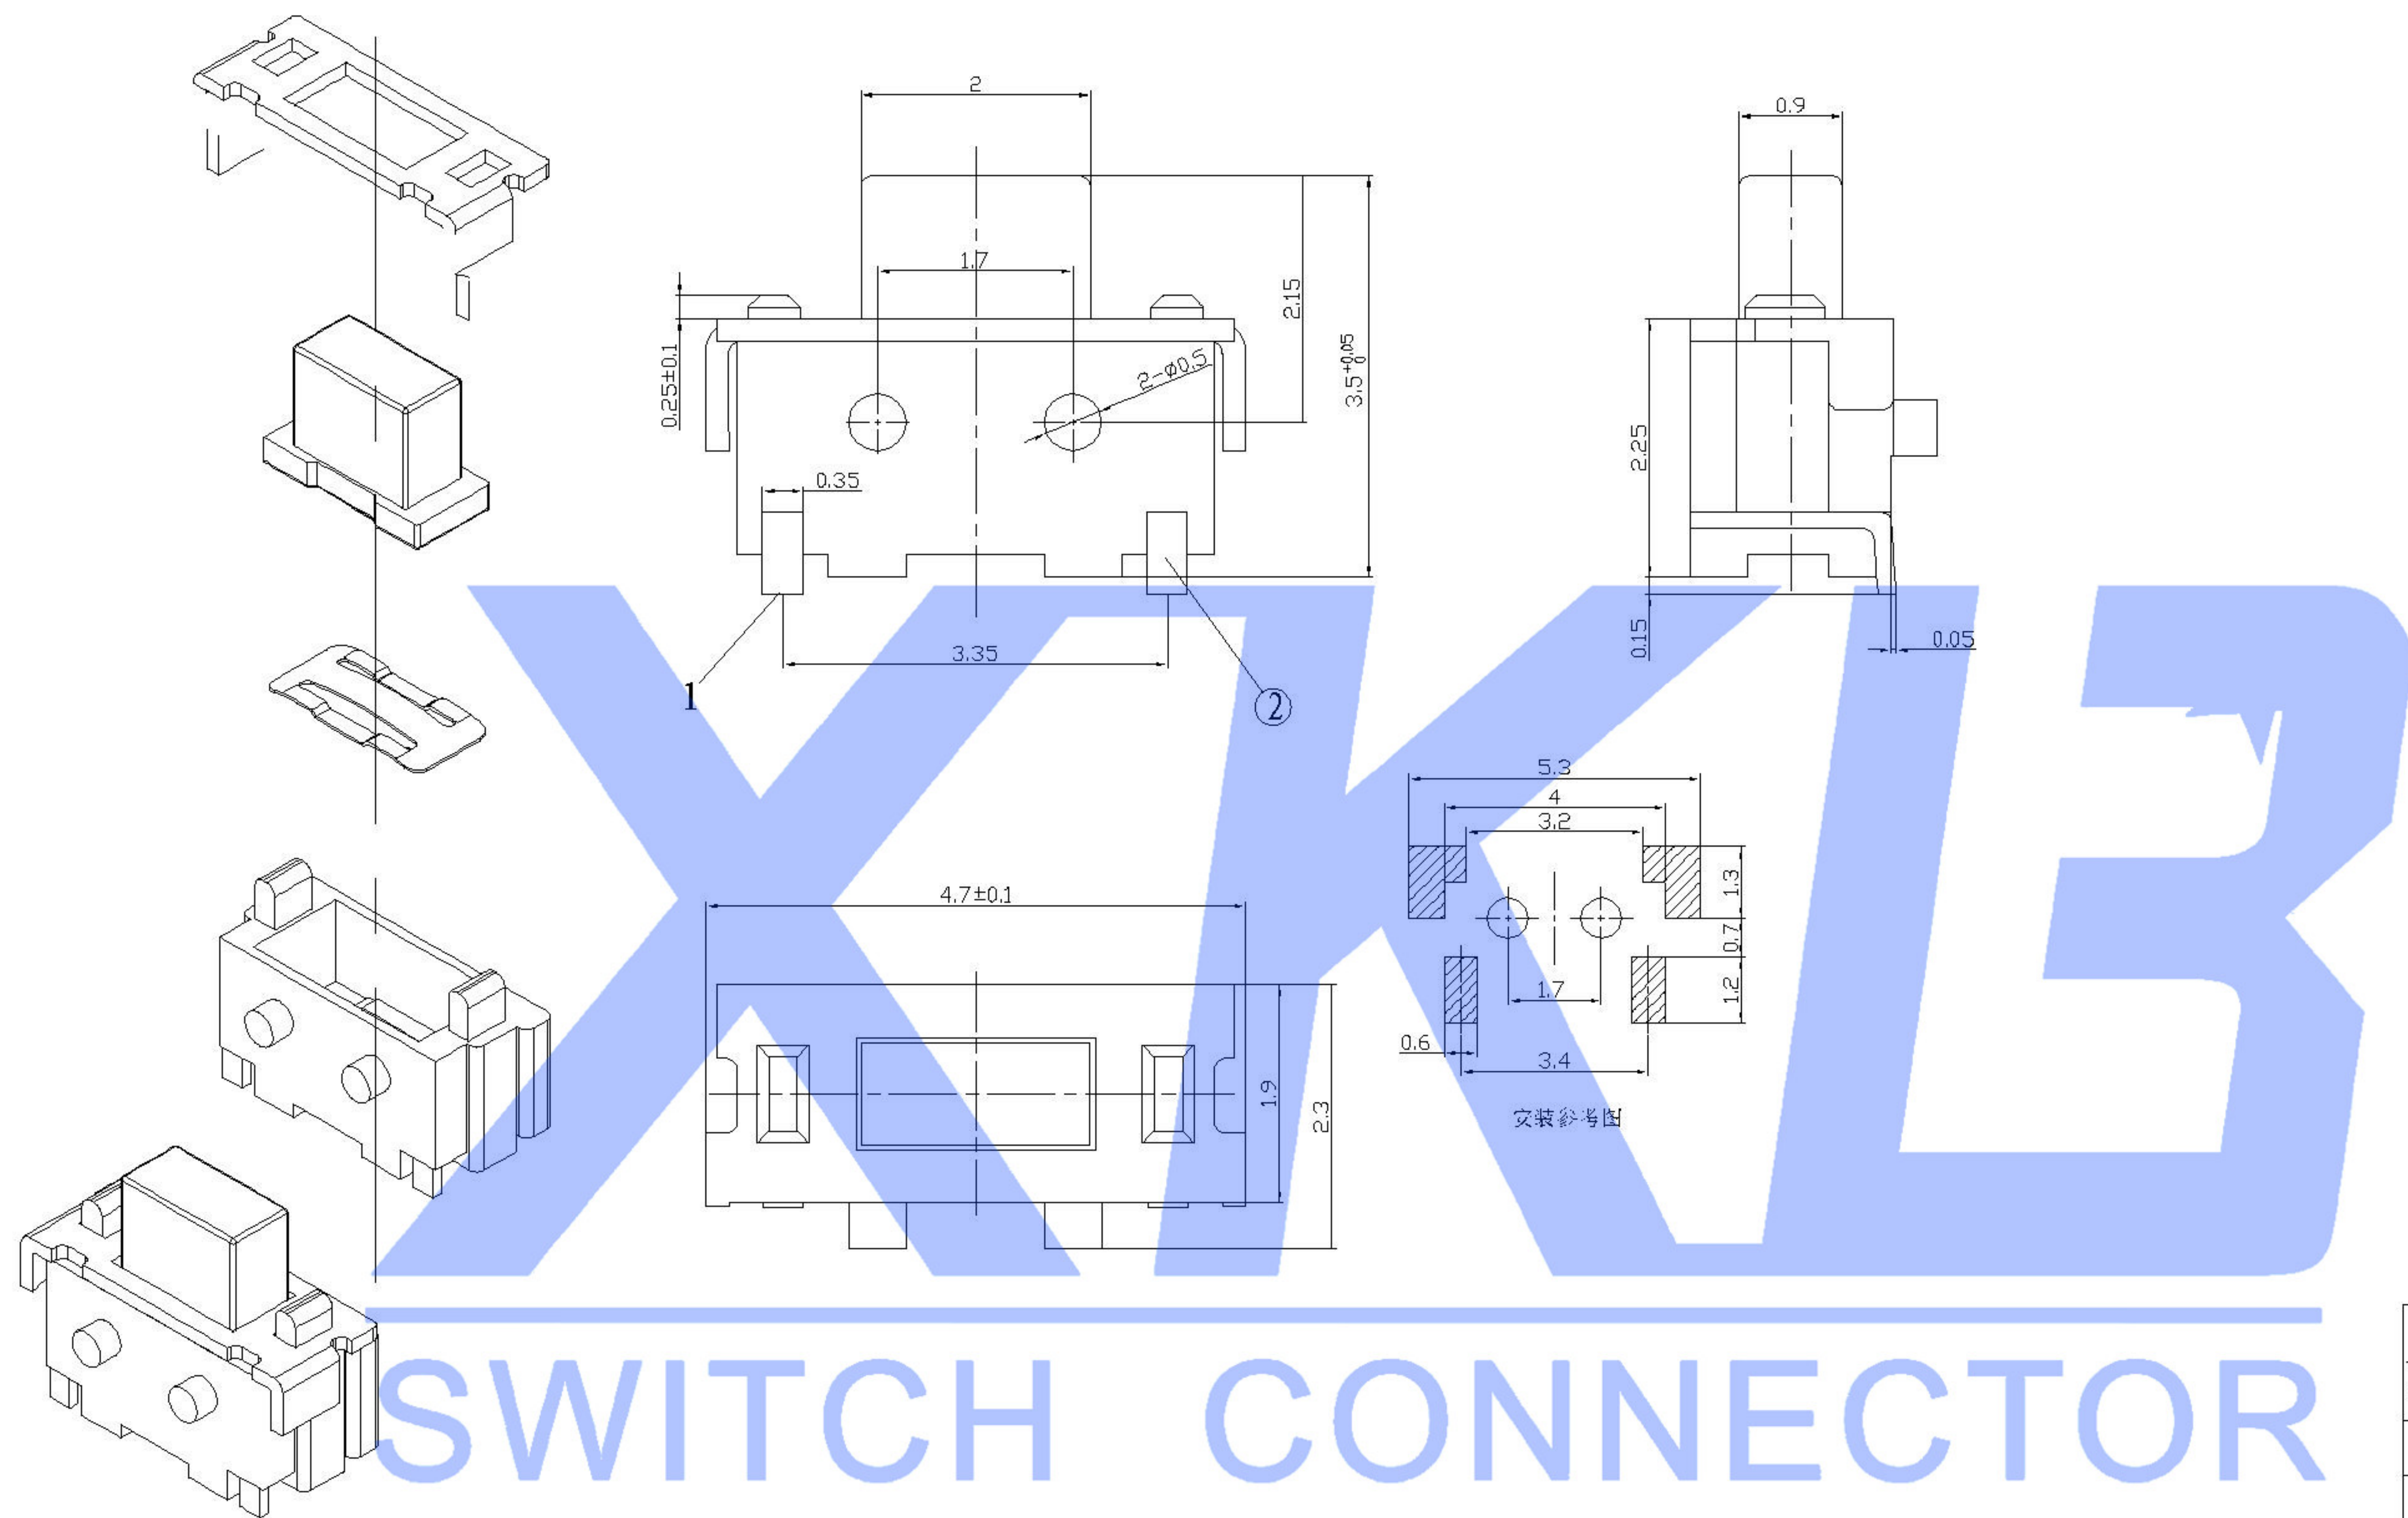


SPECIFICATION

Contact Rating	50mA, 12V DC
Contact Resistance	100mΩ max.
Insulation Resistance	100MΩ min. 500V DC
Dielectric Strength	250V AC/1 minute
Travel	0.15mm
Operating Temp.	-25°C ~ +70°C
Storage Temp.	-30°C ~ +80°C

PAPT NO	TS-1010-X-X
Operating Force	A: 100gf B: 160gf C: 260gf
Height	H: 3.5
Fixed column	A: With B: without

⑤	Terminal	—	2	Brass (0.30t)	ag Plated	—
④	Contact	—	2	F.ag/SUS		—
③	Base	—	1	LCP	Natural	—
②	Cover	—	1	Brass	Tin plated	—
①	Keystake	—	1	LCP		—
ITEM	PAPT NAMF	TER,NO	QTY	MATERIAL	FINISHING	REMARK

						DSND		DATE		SCALE: N/A	MODEL TYPE: TACT SWITCH
						DWN		DATE		VIEW: 	PART NO.:
						CHKD		DATE		UNIT: mm	DWG NO.:
						APPD		DATE		SIZE: A4	TS-1010-X-X
						XKB INDUSTRIAL PRECISION CO.,LIMITED					WEIGHT 1.0g
											SHEET 1/1
											REVISION A0

units:	mm
tolerance:	X.X ±0.2mm
	X.XX ±0.1mm
	X.XXX ±0.05mm
	UNSPECIFIED TOLERANCES

△X				
△X				
△X				
MARK	DESCRIPTION	DATE	REVISED	APPROVED
REVISIONS				
www.xk-dg.cn www.helloxkb.com www.helloxkb.cn				